

optibelt **SUPER TX M=S***

The extraordinary flexibility of the raw edge, moulded cogged SUPER TX V-Belts enables extremely small pulley diameters to be used. High quality rubber compounds in connection with low stretch tension cords guarantee high power transmissions and increased operational life.

Advantages


- Extremely high power capacity
- Extraordinary efficiency
- Well-engineered material technology
- Improved abrasion resistance
- Low stretch
- Extreme transverse rigidity
- Excellent heat / oil resistance

Optibelt SUPER TX M=S V-Belts are unmeasured, can be used in sets and guarantee a wide performance range when it comes to high levels of efficiency.

Examples of Applications

- | | |
|----------------------|------------------------------|
| Machine construction | ■ Fans |
| | ■ Pumps |
| | ■ Blenders |
| | ■ Milling plants |
| | ■ Special machines |
| Machine tools | ■ Lathes / drilling machines |
| | ■ Grinding machines |
| Motor vehicles | ■ Generators |
| | ■ Water pumps |
| | ■ Fans |

*** M=S can be used in sets without further measurement**

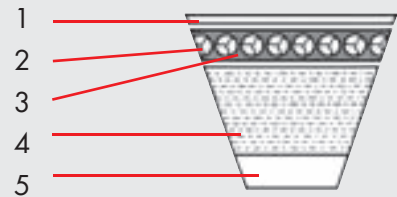

- 1 Outer belt surface
- 2 Cable cord – tension cord
- 3 Cushion compound
- 4 Base compound
- 5 Moulded cog

Sections:


ZX/X10; AX/X13; BX/X17; CX/X22;

Dimensions:

587 to 3550 mm
Standard range
further sizes on request


V-Grooved pulleys:

all standard pulleys
Special pulleys on request

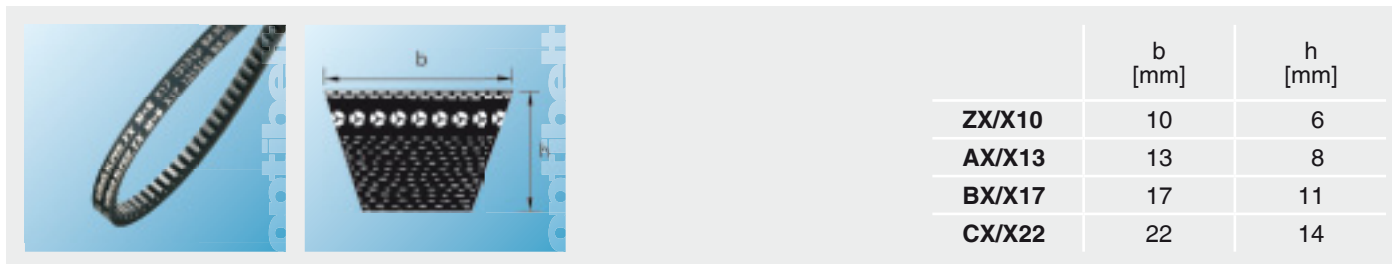

	b [mm]	h [mm]
ZX/X10	10	6
AX/X13	13	8
BX/X17	17	11
CX/X22	22	14

ZX/X10		AX/X13				BX/X17				CX/X22	
Riemen-Nr. Belt no.	Richtlänge Dat. length [mm]	Riemen-Nr. Belt no.	Richtlänge Dat. length [mm]	Riemen-Nr. Belt no.	Richtlänge Dat. length [mm]	Riemen-Nr. Belt no.	Richtlänge Dat. length [mm]	Riemen-Nr. Belt no.	Richtlänge Dat. length [mm]	Riemen-Nr. Belt no.	Richtlänge Dat. length [mm]
ZX 23	597	AX 23	605	AX 62	1605	BX 23	610	BX 67	1740	CX 39	1058
ZX 24	622	AX 23½	630	AX 63	1630	BX 25	670	BX 69	1790	CX 43	1148
ZX 25	652	AX 24	640	AX 67	1730	BX 26	690	BX 71	1840	CX 49	1308
ZX 26	672	AX 25	660	AX 70	1805	BX 28	750	BX 73	1890	CX 52	1378
ZX 27	692	AX 26½	700	AX 71	1830	BX 29	765	BX 75	1940	CX 55	1458
ZX 28	732	AX 27	716	AX 75	1930	BX 30	790	BX 79	2040	CX 59	1558
ZX 29	752	AX 28	740	AX 79	2030	BX 31	815	BX 88	2280	CX 62	1632
ZX 29½	772	AX 29	760	AX 88	2270	BX 32	840	BX 93	2400	CX 67	1758
ZX 31½	822	AX 30	797	AX 93	2390	BX 33	876	BX 98	2540	CX 68	1785
ZX 32	842	AX 31	805	AX 98	2530	BX 34	890	BX 103	2656	CX 71	1858
ZX 33	847	AX 32	843	AX 104	2680	BX 34½	915	BX 104	2690	CX 75	1958
ZX 33½	872	AX 33	871	AX 110	2830	BX 35	929	BX 110	2840	CX 79	2058
ZX 35	897	AX 34	880	AX 118	3030	BX 36	940	BX 118	3040	CX 81	2118
ZX 36	922	AX 35	919	AX 124	3180	BX 37	965	BX 124	3190	CX 85	2217
ZX 37	947	AX 35½	930	AX 132	3380	BX 38	1005	BX 132	3390	CX 88	2298
ZX 38	972	AX 36	944			BX 39	1040			CX 90	2344
ZX 40	1038	AX 37	955			BX 40	1056			CX 93	2418
ZX 42	1082	AX 37½	980			BX 41	1080			CX 96	2496
ZX 46½	1202	AX 38	995			BX 42	1100			CX 98	2558
ZX 52	1342	AX 39	1030			BX 43	1130			CX 110	2858
ZX 55	1422	AX 40	1046			BX 44	1160			CX 118	3058
ZX 59	1522	AX 41½	1080			BX 45	1190			CX 124	3208
		AX 42	1090			BX 45½	1203			CX 132	3408
		AX 43	1130			BX 46	1215				
		AX 44	1150			BX 46½	1220				
		AX 45½	1180			BX 47	1240				
		AX 46	1198			BX 48	1255				
		AX 47	1230			BX 49	1290				
		AX 48	1250			BX 50	1315				
		AX 49	1280			BX 51	1340				
		AX 50	1300			BX 52	1360				
		AX 51	1330			BX 53	1390				
		AX 52	1350			BX 54	1412				
		AX 53	1380			BX 55	1440				
		AX 54	1405			BX 57	1490				
		AX 55	1430			BX 58	1513				
		AX 56	1452			BX 59	1540				
		AX 57	1480			BX 61	1590				
		AX 58	1505			BX 62	1615				
		AX 59	1530			BX 63	1640				

Bestellbeispiel Order example	Produkt Product	Profil/Ausführung Profile and model	Richtlänge Datum length ISO [mm]	
Optibelt SUPER TX M=S	Keilriemen V-Belt	X22	3408	