



Corone per catene a rulli ASA

DIN 8188 – ISO 606 – ANSI B 29.1

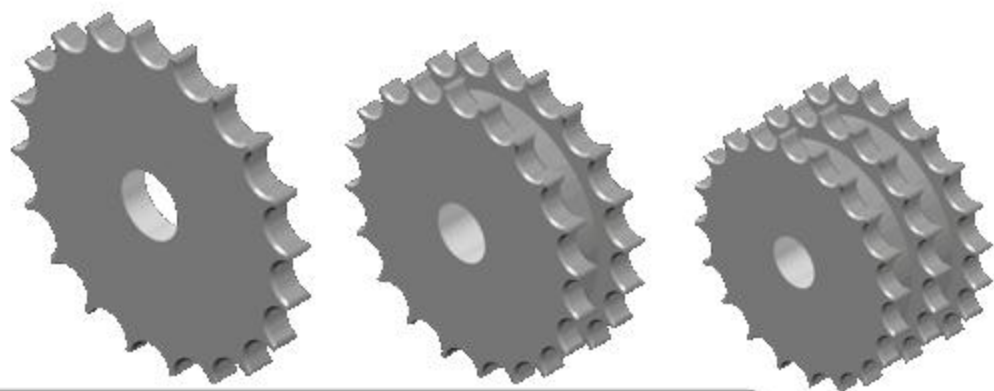

Catalogo tecnico 2009

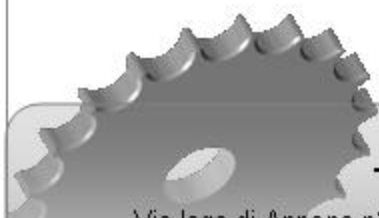

-Trasmissioni industriali s.a.s. -

Via lago di Annone n°15 36015 Schio VI - Italy – Tel: 0445-500142 fax: 0445-500018



Mail: info@trasmissioniindustriali.com Site web: www.trasmissioniindustriali.com



CORONE PER CATENE A RULLI - DIN 8188 - ISO 606 - ANSI B 29.1
PLATE WHEELS FOR ROLLER CHAINS - DIN 8188 - ISO 606 - ANSI B 29.1

ASA 40

12,7 x 7,95 mm
Rullo 7,95 mm
08A - 1



B1	B2	B3	b1	C	r3
7,2				1,6	13,5

Z	de	dp	semplici		doppie		triple		Z	de	dp	semplici		doppie		triple	
			D1	Kg.	D2	Kg.	D3	Kg.				D1	Kg.	D2	Kg.	D3	Kg.
8	39,3	33,18							51	212,9	206,30						
9	43,2	37,13							52	217,0	210,34						
10	47,2	41,10	8	0,06					53	221,0	214,37						
11	51,2	45,07							54	225,0	218,43						
12	55,2	49,07							55	229,1	222,46						
13	59,2	53,06	10	0,10					56	233,1	226,50						
14	63,2	57,07							57	237,2	230,54	20	2,25				
15	67,2	61,09							58	241,2	234,62						
16	71,2	65,10							59	245,2	238,62						
17	75,2	69,11	10	0,18					60	249,3	242,66						
18	79,2	73,14							62	257,4	250,74						
19	83,3	77,16	10	0,23					64	265,4	258,82						
20	87,3	81,19	10	0,27					65	269,5	262,86						
21	91,3	85,22	12	0,28					66	273,5	266,90						
22	95,4	89,24							68	281,6	274,99						
23	99,4	93,27							70	289,7	283,07						
24	103,4	97,29	12	0,38					72	297,8	291,16						
25	107,4	101,33							75	309,9	303,27						
26	111,5	105,36							76	313,9	307,33						
27	115,5	109,40							78	322,0	315,40						
28	119,5	113,42							80	330,1	323,48						
29	123,6	117,46							85	350,3	343,69						
30	127,6	121,50	16	0,58					90	370,5	363,90						
31	131,6	125,54							95	390,7	384,11						
32	135,7	129,56	16	0,68					100	410,9	404,31						
33	139,7	133,60							110	451,4	444,74						
34	143,8	137,64	16	0,78					114	467,5	460,90						
35	147,8	141,68	16	0,83					120	491,8	485,16						
36	151,8	145,72							125	512,0	505,37						
37	155,9	149,76															
38	159,9	153,80	16	0,98													
39	163,9	157,83															
40	168,0	161,87															
41	172,5	165,91															
42	176,6	169,95															
43	180,6	173,99															
44	184,6	178,03	20	1,32													
45	188,7	182,07															
46	192,7	186,10															
47	196,8	190,14															
48	200,8	194,18	20	1,58													
49	204,8	198,22															
50	208,9	202,26	20	1,73													





CORONE PER CATENE A RULLI - DIN 8188 - ISO 606 - ANSI B 29.1

PLATE WHEELS FOR ROLLER CHAINS - DIN 8188 - ISO 606 - ANSI B 29.1

ASA 50

15,875 x 9,53 mm
Rullo 10,16 mm
10A - 1



B1	B2	B3	b1	C	r3
8,7				2	17



Z	de	dp	semplici D1 Kg.	doppie D2 Kg.	triple D3 Kg.	Z	de	dp	semplici D1 Kg.	doppie D2 Kg.	triple D3 Kg.
8	48,4	41,48	10	0,06		51	266,3	257,87	20	3,56	
9	53,3	46,42	10	0,09		52	271,3	262,92	20	3,70	
10	58,3	51,37	10	0,11		53	276,4	267,97	20	3,85	
11	63,2	56,34	10	0,14		54	281,4	273,03	20	4,00	
12	68,2	61,34	10	0,17		55	286,5	278,08	20	4,15	
13	73,2	66,32	10	0,20		56	291,5	283,13	25	4,30	
14	78,2	71,34	12	0,23		57	296,6	288,18	25	4,46	
15	83,2	76,36	12	0,27		58	301,6	293,23	25	4,62	
16	88,3	81,37	12	0,31		59	306,7	298,27			
17	93,3	86,39	12	0,36		60	311,7	303,32	25	4,95	
18	98,3	91,42	12	0,41		62	321,8	313,43	25	5,30	
19	103,3	96,45	12	0,46		64	331,9	323,53	25	5,65	
20	108,4	101,49	12	0,51		65	337,0	328,58	25	5,83	
21	113,4	106,52	12	0,57		68	352,1	343,74	25	6,40	
22	118,4	111,55	12	0,62		70	362,2	353,84	25	6,79	
23	123,5	116,58	12	0,68		72	372,3	363,95	25	7,19	
24	128,5	121,62	12	0,75		75	387,5	379,09	25	7,81	
25	133,6	126,66	12	0,82		76	392,5	384,16	25	8,02	
26	138,6	131,70	16	0,88		78	402,6	394,25	25	8,46	
27	143,6	136,75	16	0,95		80	412,7	404,35	25	8,91	
28	148,7	141,78	16	1,03		85	438,0	429,62	30	10,06	
29	153,7	146,83	16	1,11		90	463,3	454,88	30	11,30	
30	158,8	151,87	16	1,19		95	488,5	480,14	30	12,61	
31	163,8	156,92	16	1,28		100	513,8	505,40	30	13,99	
32	168,9	161,95	16	1,36		110	564,3	555,92	30	16,97	
33	173,9	167,00	16	1,45		114	584,5	576,13	30	19,98	
34	178,9	172,05	16	1,55		120	614,8	606,44	30	22,17	
35	184,0	177,10	16	1,64		125	640,1	631,71	30	24,08	
36	189,0	182,15	20	1,73							
37	194,1	187,20	20	1,83							
38	199,1	192,24	20	1,94							
39	204,2	197,29	20	2,05							
40	209,2	202,34	20	2,16							
41	215,8	207,39	20	2,28							
42	220,8	212,44	20	2,39							
43	225,9	217,49	20	2,50							
44	230,9	222,53	20	2,63							
45	236,0	227,58	20	2,75							
46	241,0	232,63	20	2,88							
47	246,1	237,68	20	3,00							
48	251,1	242,73	20	3,14							
49	256,2	247,78	20	3,28							
50	261,2	252,82	20	3,42							



CORONE PER CATENE A RULLI - DIN 8188 - ISO 606 - ANSI B 29.1
PLATE WHEELS FOR ROLLER CHAINS - DIN 8188 - ISO 606 - ANSI B 29.1

ASA 60

19,05 x 12,7 mm
Rullo 11,91 mm
12A - 1



B1	B2	B3	b1	C	r3
11,6				2,4	20

Z	de	dp	semplici		doppie		triple		Z	de	dp	semplici		doppie		triple	
			D1	Kg.	D2	Kg.	D3	Kg.				D1	Kg.	D2	Kg.	D3	Kg.
8	58,1	49,78							51	319,7	309,45						
9	64,0	55,70							52	325,8	315,50						
10	70,0	61,64							53	331,8	321,56						
11	76,0	67,61							54	337,9	327,64						
12	81,9	73,60							55	343,9	333,70						
13	87,9	79,59	14	0,35					56	350,0	339,75						
14	94,0	85,61	14	0,41					57	356,1	345,81						
15	100,0	91,63	14	0,48					58	362,1	351,87						
16	106,0	97,65	14	0,55					59	368,2	357,93						
17	112,0	103,67	14	0,63					60	374,2	363,99						
18	118,0	109,71	14	0,71					62	386,4	376,12						
19	124,1	115,75							64	398,5	388,24						
20	130,1	121,78	14	0,92					65	404,5	394,29						
21	136,2	127,82	16	0,99					66	410,6	400,35						
22	142,2	133,86	16	1,09					68	422,7	412,49						
23	148,2	139,90	16	1,20					70	434,9	424,60						
24	154,3	145,94							72	447,0	436,74						
25	160,3	152,00	16	1,43					75	465,2	454,91						
26	166,4	158,04	16	1,56					76	471,2	460,99						
27	172,4	164,09	16	1,68					78	483,3	473,10						
28	178,5	170,13	16	1,82					80	495,5	485,22						
29	184,5	176,19	16	1,96					85	525,8	515,55						
30	190,6	182,25	16	2,10					90	556,1	545,86						
31	196,6	188,31	20	2,24					95	586,4	576,17						
32	202,7	194,35	20	2,39					100	616,7	606,47						
33	208,8	200,40							110	677,4	667,11						
34	214,8	206,46	20	2,71					114	701,6	691,36						
35	220,9	212,52	20	2,88					120	738,0	727,74						
36	226,9	218,58	20	3,06					125	768,3	758,05						
37	233,0	224,64															
38	239,0	230,69	20	3,42													
39	245,1	236,75															
40	251,1	242,81	20	3,85													
41	259,1	248,87															
42	265,2	254,93	25	4,19													
43	271,2	260,98															
44	277,3	267,03															
45	283,3	273,10															
46	289,4	279,16															
47	295,5	285,21															
48	301,5	291,27															
49	307,6	297,33															
50	313,6	303,39															





CORONE PER CATENE A RULLI - DIN 8188 - ISO 606 - ANSI B 29.1

PLATE WHEELS FOR ROLLER CHAINS - DIN 8188 - ISO 606 - ANSI B 29.1

ASA 80

25,4 x 15,88 mm
Rullo 15,88 mm
16A - 1



B1	B2	B3	b1	C	r3
14,6				3,2	27



Z	de	dp	semplici D1 Kg.		doppie D2 Kg.		triple D3 Kg.		Z	de	dp	semplici D1 Kg.		doppie D2 Kg.		triple D3 Kg.	
8	77,9	66,37							51	426,5	412,60						
9	85,8	74,27							52	434,5	420,67						
10	93,8	82,19							53	442,5	428,75						
11	101,7	90,14							54	450,6	436,85						
12	109,7	98,14	16	0,77					55	458,7	444,93						
13	117,7	106,12							56	466,8	453,01						
14	125,7	114,15	16	1,01					57	474,9	461,07						
15	133,7	122,17							58	482,9	469,16						
16	141,8	130,20	20	1,43					59	491,0	477,24						
17	149,8	138,22	20	1,64					60	499,1	485,32						
18	157,8	146,28	20	1,85					62	515,3	501,50						
19	165,9	154,33	20	2,08					64	531,4	517,65						
20	173,9	162,38	20	2,12					65	539,5	525,73						
21	182,0	170,43	20	2,45					66	547,6	533,80						
22	190,1	178,48	20	2,84					68	563,8	549,98						
23	198,1	186,53	20	3,13					70	579,9	566,14						
24	206,2	194,59	20	3,42					72	596,1	582,32						
25	214,2	202,66							75	620,3	606,35						
26	222,3	210,72	20	4,05					76	628,4	614,65						
27	230,4	218,79							78	644,6	630,80						
28	238,4	226,85	20	4,73					80	660,7	646,96						
29	246,5	234,92	20	5,09					85	701,2	687,40						
30	254,6	243,00	20	5,46					90	741,6	727,81						
31	262,6	251,08							95	782,0	768,22						
32	270,7	259,13							100	822,4	808,63						
33	278,8	267,21	25	6,63					110	903,3	889,48						
34	286,9	275,28	25	7,06					114	935,6	921,81						
35	294,9	283,36	25	7,49					120	984,1	970,33						
36	303,0	291,44							125	1024,5	1010,73						
37	311,1	299,51															
38	319,2	307,59	25	8,88													
39	327,2	315,67															
40	335,3	323,73															
41	345,6	331,82															
42	353,7	339,90															
43	361,7	347,98															
44	369,8	356,06															
45	377,9	364,12															
46	386,0	372,21															
47	394,1	380,29															
48	402,1	388,36															
49	410,2	396,44															
50	418,3	404,52															



CORONE PER CATENE A RULLI - DIN 8188 - ISO 606 - ANSI B 29.1
PLATE WHEELS FOR ROLLER CHAINS - DIN 8188 - ISO 606 - ANSI B 29.1

ASA 100

31,75 x 19,05 mm
Rullo 19,05 mm
20A - 1



B1	B2	B3	b1	C	r3
17,6				4	33,5

Z	de	dp	semplici		doppie		triple		Z	de	dp	semplici		doppie		triple	
			D1	Kg.	D2	Kg.	D3	Kg.				D1	Kg.	D2	Kg.	D3	Kg.
8	96,0	82,96							51	531,7	515,75						
9	106,5	92,84							52	541,8	525,84						
10	117,0	102,74							53	551,9	535,94						
11	127,0	112,68							54	562,0	546,07						
12	137,0	122,68							55	572,1	556,16						
13	147,5	132,65							56	582,2	566,26						
14	157,6	142,68							57	592,3	576,36						
15	167,7	152,72							58	602,4	586,45						
16	177,7	162,75							59	612,5	596,55						
17	187,7	172,78	20	2,96					60	622,6	606,65						
18	197,8	182,85	20	3,28					62	642,8	626,87						
19	207,9	192,91							64	663,0	647,06						
20	217,9	202,98							65	673,1	657,16						
21	228,0	213,04	25	4,62					66	683,2	667,26						
22	238,1	223,11							68	703,4	687,48						
23	248,2	233,17							70	723,6	707,67						
24	258,3	243,23							72	743,8	727,90						
25	268,4	253,33							75	774,2	758,19						
26	278,4	263,40							76	784,3	768,32						
27	288,5	273,48							80	824,7	808,72						
28	298,5	283,56							85	875,2	859,25						
29	308,6	293,65							90	925,7	909,76						
30	318,7	303,75							95	976,2	960,28						
31	328,8	313,85							100	1026,7	1010,79						
32	338,9	323,91							114	1168,2	1152,26						
33	349,0	334,01															
34	359,1	344,10															
35	369,2	354,20															
36	379,2	364,30															
37	389,3	374,39															
38	399,4	384,49															
39	409,5	394,59															
40	419,6	404,66															
41	430,7	414,78															
42	440,8	424,88															
43	450,9	434,97															
44	461,0	445,07															
45	471,1	455,17															
46	481,2	465,26															
47	491,3	475,36															
48	501,4	485,46															
49	511,5	495,55															
50	521,6	505,65															





CORONE PER CATENE A RULLI - DIN 8188 - ISO 606 - ANSI B 29.1

PLATE WHEELS FOR ROLLER CHAINS - DIN 8188 - ISO 606 - ANSI B 29.1

ASA 120

38,1 x 25,4 mm
Rullo 22,23 mm
24A - 1



B1	B2	B3	b1	C	r3
23,5				4,8	40,5



Z	de	dp	semplici D1 Kg.		doppie D2 Kg.		triple D3 Kg.	
8	113,0	99,55						
9	125,0	111,40	20	1,47				
10	137,0	123,29	20	1,85				
11	149,0	135,21	25	2,24				
12	161,0	147,22						
13	173,0	159,18	25	3,22				
14	185,0	171,22	25	3,68				
15	197,0	183,26	25	4,34				
16	209,0	195,30	25	4,88				
17	221,0	207,34	25	5,69				
18	233,0	219,42	25	6,29				
19	245,5	231,49						
20	257,5	243,57	25	7,95				
21	270,5	255,65						
22	282,5	267,73						
23	294,5	279,80						
24	307,0	291,88						
25	319,0	304,00	30	12,25				
26	331,0	316,08						
27	343,0	328,19						
28	355,0	340,27						
29	367,5	352,38						
30	379,5	364,50						
31	391,5	376,62						
32	403,5	388,69						
33	415,5	400,81						
34	428,5	412,93						
35	440,0	425,04	30	24,65				
36	452,0	437,16						
37	464,0	449,27						
38	476,5	461,39						
39	488,5	473,50						
40	501,5	485,62						
41	513,5	497,74						
42	525,5	509,85						
43	538,0	521,97						
44	550,0	534,08						
45	562,0	546,20						
46	574,0	558,32						
47	586,5	570,43						
48	598,5	582,55						
49	610,5	594,66						
50	622,5	606,78						
51	635,0	618,89						
52	647,0	631,01						
53	659,0	643,13						
54	671,0	655,25						
55	683,5	667,40						
56	695,5	679,50						
57	707,5	691,63						
58	719,5	703,74						
59	731,5	715,86						
60	745,0	727,97						
62	769,0	752,24						
64	793,5	776,48						
65	805,5	788,59						
66	817,5	800,71						
68	842,0	824,98						
70	866,0	849,21						
72	890,5	873,48						
75	926,5	909,83						
76	939,0	921,98						
80	987,5	970,44						
85	1048,0	1031,10						
90	1169,0	1152,33						



CORONE PER CATENE A RULLI - DIN 8188 - ISO 606 - ANSI B 29.1
PLATE WHEELS FOR ROLLER CHAINS - DIN 8188 - ISO 606 - ANSI B 29.1

ASA 140
44,45 x 25,4 mm
Rullo 25,4 mm
28A - 1

B1	B2	B3	b1	C	r3
23,5				5,8	47,5



Z	de	dp	semplici		doppie		triple		Z	de	dp	semplici		doppie		triple	
			D1	Kg.	D2	Kg.	D3	Kg.				D1	Kg.	D2	Kg.	D3	Kg.
8	132,0	116,15															
9	146,0	129,96	20	2,07													
10	160,0	143,85	20	2,59													
11	174,0	157,77	25	3,04													
12	188,0	171,74	25	3,72													
13	204,0	185,75	25	4,37													
14	218,0	199,76	25	5,16													
15	232,0	213,79															
16	246,0	227,84	30	6,85													
17	260,0	241,90	30	7,68													
18	274,0	255,98															
19	289,0	270,06															
20	303,0	284,15															
21	317,0	298,24															
22	331,0	312,34															
23	345,0	326,44															
24	359,0	340,55															
25	373,0	354,66															
26	387,0	368,77															
27	401,0	382,88															
28	416,0	397,00															
29	430,0	411,12															
30	444,0	425,24															
31	458,0	439,37															
32	472,0	453,49															
33	486,0	467,62															
34	500,0	481,75															
35	514,0	495,88															
36	529,0	510,01															
37	543,0	524,13															
38	557,0	538,27															
39	571,0	552,40															
40	585,0	566,54															
45	656,0	637,22															
50	726,0	707,91															
57	825,0	806,90															
60	869,0	849,32															
76	1095,0	1075,62															